

jc825 U.S. PTO  
09/672814  
09/29/00Agent's File: 91436-256

A

THE HONOURABLE ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

PTO CUSTOMER NO. 22463

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Lin LIN, Jason ADELMAN, Lloyd FLORENCE, Ping LIN

For: IMPROVED SPEECH RECOGNITION SYSTEM AND  
METHOD PERMITTING USER CUSTOMIZATION

Enclosed are:

8 sheet(s) of drawing(s).  
 An assignment of the inventor(s) to NORTEL NETWORKS LIMITED  
 A certified copy of a \_\_\_\_\_ application.  
 Declaration and power of attorney.  
 Verified statement(s) to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.  
 An Information Disclosure Statement.

jc825 U.S. PTO  
09/672814  
09/29/00

The filing fee has been calculated as shown below:

FOR:	(Col. 1) NO. FILED	(Col. 2) NO. EXTRA	SMALL ENTITY		OR	OTHER THAN SMALL ENTITY	
			RATE	Fee		RATE	Fee
BASIC FEE					OR		\$690.00
TOTAL CLAIMS	21 - 20 = 1	* 1	x 9		OR	1 x 18	\$18.00
INDEP. CLAIMS	6 - 3 = 3	* 3	x 39		OR	3 x 78	\$234.00
MULTIPLE DEPENDENT CLAIM PRESENTED			x 130		OR	x 260	
ASSIGNMENT(S) RECORDATION FEE(S)			x 40			x 40	40.00
* If the difference in Col. 1 is less than zero, enter "0" in Col. 2			TOTAL		OR	TOTAL	\$982.00

Agent's File: 91436-256THE HONOURABLE ASSISTANT COMMISSIONER FOR PATENTS  
Page 2

Please charge our Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_.  
A duplicate copy of this sheet is enclosed.

A cheque in the amount of \$942.00 is enclosed to cover the filing fees.


The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 19-2548.  
A duplicate copy of this sheet is enclosed.

Any additional filing fees required under 37 CFR 1.16.  
 Any patent application processing fees under 37 CFR 1.17.

The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. \_\_\_\_\_.  
A duplicate copy of this sheet is enclosed.

Any patent application processing fees under 37 CFR 1.17.  
 The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).  
 Any filing fees under 37 CFR 1.16 for presentation of extra claims.

Respectfully submitted,

  
Ronald D. Faggetter

Registration No. 33,345

SMART & BIGGAR  
438 University Avenue  
Suite 1500, Box 111  
Toronto, Ontario  
Canada M5G 2K8

Telephone No.: (416) 593-5514  
Fax No.: (416) 591-1690

Enclosures  
(91436-256 MZ/mtb)  
September 28, 2000

Attorney Docket: 91436-256

APPLICATION  
FOR  
UNITED STATES LETTERS PATENT

(Continuation-in-Part of U.S. Patent Application No. 09/281,078  
filed March 30, 1999)

TITLE: IMPROVED SPEECH RECOGNITION SYSTEM  
AND METHOD PERMITTING USER  
CUSTOMIZATION

APPLICANT: Lin LIN et al.

00022614 0002600

IMPROVED SPEECH RECOGNITION SYSTEM AND METHOD PERMITTING  
USER CUSTOMIZATION

RELATED APPLICATIONS

5

This is a continuation-in-part application of U.S. Patent Application No. 09/281,078 filed March 30, 1999, the contents of which are hereby incorporated by reference.

10 FIELD OF THE INVENTION

This invention pertains generally to speech recognition, and more particularly to methods and systems for recognizing non-standard speech, and for allowing customized speech recognition.

15 BACKGROUND OF THE INVENTION

Methods of recognizing and electronically transcribing human speech are known in the art. (See, for example, *The HTK Book*, Version 2.1, Steve Young et al., Cambridge University Technical Services Ltd., March 1997, Chapter 1.) They are generally based on storing mathematical models of spoken words, converting incoming utterances into mathematical models, and attempting to match the models of incoming utterances with stored models of words.

25 A well known application of this technology is a dictation program for a personal computer (PC), which allows a user to create a text file by dictating into a microphone, rather than by typing on a keyboard. Such a program is typically furnished to the user with associated audio hardware, including a circuit board for inclusion in the user's PC and a microphone for connection to the circuit board.

30 Typically, a user newly acquiring a dictation program "trains" it (i.e., spends several hours dictating text to it.) The program uses the training speech stream for

two purposes: i) to determine the spectral characteristics of the user's voice (as delivered through the particular supplied microphone and circuit board) for its future use in converting the user's utterances to mathematical models; and ii) to determine words spoken by the particular user that the program has difficulty matching with its stored mathematical models of words.

A speech-recognition program, such as a dictation program, is typically supplied with a library of stored word models derived from the speech of a large number of speakers. These are known as speaker-independent models. For most 10 users, there are some words that do not match the speaker-independent models. For some users, this failure to match the models may be because of accents, regional speech variations, or vocal anomalies. Such users will be referred to herein as "non-standard users".

15 For words of a particular user, identified during the training phase as difficult to reliably match against speaker-independent models, the dictation program "learns" (i.e., derives and stores) word models from the particular user. These are known as speaker-dependent models or user-trained models. The user-trained model for a word is stored in place of the original speaker-independent word, which 20 is no longer used for recognizing the particular user's speech. Non-standard users typically require a greater number of user-trained models than standard users.

25 An emergent application of speech recognition is in voice messaging systems. The traditional means for a user to access such a system is to dial in by telephone, and request message services by pressing keys on the telephone's keypad, (e.g., "1" might connote PLAY, "2" might connote ERASE, etc.). The user may first be required to provide an identification of himself and enter a password, or the system may assume an identity for the user based on the extension from which he calls.

30 Applications are emerging wherein a user operates the voice messaging system by voice commands-- e.g., by saying the words PLAY, ERASE, etc., rather

than by pressing code keys on the keypad. To initiate a call, a user might speak the called party's number or name rather than "dial" the number by pressing keypad digits. Typically, a manufacturer defined default set of voice commands may be uttered by users in to operate the system. This set of commands must typically be

5 learned by the user, to allow the user to effectively operate the system. This learning is often quite cumbersome for users, who, as a result, may not fully utilize available commands and features. This learning difficulty is compounded by the fact that each manufacturer uses its own set of commands. A user's migration to a new system is thus often accompanied with a need to learn a new set of commands.

10

As well, there are difficulties encountered in recognizing speech in a voice messaging system that are not encountered in a dictation system including, for example: i) users may find it onerous to expend several hours training a voice messaging system; ii) unlike the single microphone and audio circuit board of a dictation system, users of a voice messaging system might call the system from many different telephone instruments which might connect over paths differing in quality from call to call, and which might use different kinds of networks from call to call; and iii) for many users, the default set of commands used to navigate through the options available in a voice messaging system are not intuitive. These difficulties compound the difficulties with recognition of utterances from non-standard users.

15

An approach that has been tried to aid the recognition of utterances by non-standard users is to regenerate the speaker-independent models, including the speech of one or more non-standard users along with the previous sampling of users. This is time-consuming and costly, and may actually degrade the models.

20

Another approach that has been tried is to eliminate the speaker-independent models and match user utterances against a speaker-dependent set of word models 30 specifically created for each non-standard user. This approach, although feasible with the limited vocabulary that may be required in a voice messaging system, does not take advantage of the large amount of work that has been done in the course of

Document 100-00000000000000000000000000000000

preparing speaker-independent models in the areas of modeling the audio characteristics of various speech transmission media (e.g. telephone lines), or in modeling the co-articulation that occurs in streams of continuous speech.

5 There is thus a need for a speech recognition system that is based on a speaker-independent set of stored words but which can adapt in a speaker-dependent manner to a non-standard speaker without a long training period.

## SUMMARY OF THE INVENTION

10 Accordingly it is an object to provide improved recognition of utterances from a non-standard speaker.

15 It is a further object of the present invention to provide a speech recognition system based on a speaker-independent set of stored words which can adapt in a speaker-dependent manner to utterances from a non-standard speaker.

20 It is a further object of the present invention to provide speech recognition that does not require a long training period.

25 It is a further object of the present invention to allow a user to customize a command set, in a speech recognition system.

These and other objects of the invention will become apparent to those skilled 25 in the art from the following description thereof.

30 In accordance with the teachings of the present invention, some of these and other objects may be accomplished by the present system of speech recognition in which an incoming audio signal is compared against stored models of words, reporting as words portions of the audio signal matching stored models practiced with the present method of providing a set of stored word models derived from utterances of many users and for use by all users, and providing for further use by

certain users second sets of stored word models, each set derived from the utterances of one of the certain users and for use only in association with audio signal from that one of the certain users. A portion of incoming audio signal matching a stored model from either set is reported as the corresponding word.

5

In accordance with an aspect of the present invention, a speech recognition system includes computer memory storing a first set of speaker-independent word models used to match a word in an utterance of a user with a word model in the first set; a second set of speaker dependent word models derived from speech of a particular user and used to match a word in an utterance of the particular speaker; and a program portion used to identify words in utterances of the particular user by attempting to match portions of an audio signal with word models among the first set, and word models among the second set.

In accordance with another aspect of the present invention, a method of  
15 operating a speech recognition system includes storing a first set of speaker-  
independent word models used to match a word in an utterance of any user with a  
word model in the first set; storing a second set of speaker dependent word models  
derived from speech of a particular user; recognizing words in utterances of the  
particular user by attempting to match portions of an audio signal with word models  
20 among the first set; and word models among the second set.

In accordance with another aspect of the invention, a method of enhancing speech recognition includes providing a set of user-independent word models derived from utterances of a plurality of speakers; providing a set of user-dependent word models for ones of a plurality of users each derived from utterances of one of the users; matching an utterance from one of the users to one of the user-independent word models; and matching another utterance from the one of the users to one of the user-dependent word models.

In accordance with yet another aspect of the present invention, a method of  
30 operating a speech recognition system includes storing a first set of recognition  
models, for recognizing speech independent of the identity of a user. The first set of

recognition models is suitable for recognizing a plurality of system commands. A second set of recognition models, for recognizing speech of a particular user is stored. At least one model of the second set may initiate performance of at least one of the plurality of system commands, so that at least one of the system

5 commands may be performed in response to a recognized user chosen utterance.

In accordance with yet another aspect of the present invention, a voice messaging system, includes a speech recognition system for controlling operation of the voice messaging system. The speech recognition includes memory storing a first set of word models, for recognizing speech independent of the identity of a user.

10 The first set of word models is suitable for recognizing a plurality of system commands controlling operation of the voice messaging system. The memory further stores a second set of models, for recognizing speech of a particular user, at least one model of the second set for initiating performance of at least one of the plurality of system commands, so that at least one of the system commands may be performed in response to a recognized user chosen word.

In accordance with a further aspect of the invention, a computer readable medium, stores a first set of recognition models, for recognizing speech independent of the identity of a user at a speech recognition system, at least some of the models in the first set for recognizing a plurality of system commands; computer executable instructions, that when executed at the speech recognition system, adapt the speech recognition system to form and store a second set of models, for recognizing speech of a particular user, with at least one model of the second set for initiating performance of at least one of the plurality of system commands, so that at least one of the system commands may be performed in response to a recognized word chosen by the particular user.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be more clearly understood by reference to the following

30 detailed description of an exemplary embodiment in conjunction with the accompanying drawings, in which:

**FIG. 1** illustrates a speech recognition system, exemplary of an embodiment of the present invention;

**FIG. 2** depicts conventional stored word models;

**FIG. 3A** depicts exemplary stored word models used in the system of **FIG. 1**;

5 **FIG. 3B** depicts stored word models for custom commands used in the system of **FIG. 1**;

**FIG. 4** is a flow chart of actions taken when a user initiates access to the system of **FIG. 1** and exemplary of an embodiment of the present invention;

10 **FIG. 5** is a flow chart illustrating recognition of utterances of a user, using the system of **FIG. 1** and exemplary of an embodiment of the present invention;

**FIG. 6** is a flowchart depicting user training of word models and user testing of word models using the system of **FIG. 1**, and exemplary of an embodiment of the present invention;

**FIG. 7** is a flowchart depicting the generation of a user-trained word model used in the system of **FIG. 1** and exemplary of an embodiment of the present invention; and

**FIGS. 8A and 8B** are flowcharts depicting the generation of a user-trained model for a custom command to be added to the system of **FIG. 1**, in a manner exemplary of an embodiment of the present invention.

20 **DETAILED DESCRIPTION**

**FIG. 1** illustrates a speech recognition system 10, exemplary of an embodiment of the present invention. As illustrated, exemplary recognition system

25 **10** includes a processor 12 in communication with computer readable memory 14.

System 10 may further include, or be in communication with an analog to digital

(A/D)/digital to analog (D/A) converter 16. A microphone 18 and speaker 20 are in

communication with converter 16. Preferably, system 10 forms part of an otherwise conventional telephony voice messaging system. Microphone 18 and speaker 20

30 may thus be part of a telephone handset, in communication with converter 16, by way of a telephone network such as the public switched telephone network

("PSTN"). Converter 16 could thus form part of system 10, or optionally form part of

2008-02-05 10:47:50

a digital telephone network. In any event, in the described embodiment, processor 12 is provided with digital data representative of spoken words, in order to recognize speech, in manners exemplary of the present invention.

5 Software adapting system 10 to function as a voice messaging system, and to function in manners exemplary of the present invention may be stored in memory 14. Similarly a database (described in greater detail below) storing word models used to recognize speech may be stored in memory 14. As will be appreciated, software and data adapting system 10 to function accordingly may be loaded from a 10 computer readable medium 22, which may be a CD-ROM, diskette, tape or other suitable medium.

15 A vocabulary is determined for a particular application, in a particular language, and perhaps in a particular regional variation of that language. For a voice messaging system to be deployed in the English language, for example, the vocabulary might consist of the names of the ten numerical digits (zero through nine) and appropriate default command words such as PLAY, NEXT, LAST, ERASE, STOP, etc. A group of people deemed to be standard speakers of the language are asked to provide spoken specimens of the vocabulary words. A set of speaker-independent word models is constructed according to a composite or according to an average of those spoken specimens. Possibly, sets of speaker-independent word models are constructed for each of several transmission media (types of 20 telephone terminal equipment, types of telephone networks, etc.).

25 There may also be speaker-dependent word models for each user, which are constructed, as will be described, from specimens of words or utterances spoken by one or more particular user(s).

30 A large number of recognition models that may be used for speech recognition will be readily appreciated by persons of ordinary skill in the art. Stored models are preferably stored within a conventional database stored within memory 14 of system 10. Exemplary models 200 and 210 are illustrated in FIGS. 3A and

3B. The remainder of software stored within memory **14** is appropriately adapted to recognize speech using the stored models.

**FIG. 4** is a flow chart showing actions taken by system **10** under software

5 control when a user initiates access to a voice messaging system in a manner exemplary of the present invention. The flow is entered at connector **300**, and block **310**, according to predetermined parameters, establishes an initial "context". The context includes speaker-independent models, in a particular language, for the words that the user is permitted to speak upon initiating access to the system.

10

The user is speculatively identified according to such factors as the extension from which he is calling. In block **320**, any user-trained models **210** (**FIG. 3B**) that are valid in the present context for the speculatively identified user are loaded. (The generation of user-trained models **210** is discussed below in connection with **FIGS. 7** and **8**.)

15

The user provides a login code or a password to positively identify himself, either by spoken utterances or by keypad entries. His code or password is verified in block **330**. If the user provided spoken utterances, block **330** interprets these according to the models presently loaded.

20

Block **340** then determines, according to the user's positive identification, whether the speculative identification made in block **320** was valid. If it was not, block **350** is invoked to load user-trained recognition models corresponding to the identified user and valid in the initial context. These recognition models replace any user-trained models that may have been loaded in block **320**.

25

Control then passes, through connector **400**, to the process depicted in **FIG.**

5. A user utterance or a user key-press is awaited.

30

Block **410** determines, by recognizing the appropriate key-press or by matching the user's utterance against the appropriate one of the stored models,

whether the user has requested to train the system. If so, control is dispatched through connector 500 to the flow depicted in FIG. 6 (to be discussed below). As will become apparent, a user may train system 10 in order to add speaker-dependent models for words for which speaker independent models already exist, or for new words or utterances that may initiate commands in place of default commands. Thus, such user-trained, speaker dependent models 210, may be used in order to facilitate recognition of words by system 10 (FIG. 1), or to add custom control commands to the vocabulary of system 10.

10        If the user has not requested training, block 420 attempts to match the user's utterance against the stored models, which include speaker-independent and user-trained models for the utterance acceptable in the current context in the current language. For some words, there may be two models: one speaker independent and one user-trained. The two models need not represent the same spoken word in the current language. Two words may thus be interpreted as having the same meaning. One word may represent the default word for a system recognized command, the other may represent a user preferred word or utterance, for which a speaker dependent recognition model is stored within user trained models 210. In block 420, an indication is preferably generated of the word with the best probability of matching the user's utterance, and an assessment of that probability.

15        Block 430 determines whether the probability of a match exceeds a predetermined threshold (i.e., whether it may be supposed that an actual match, as opposed to a mere similarity, has been found). If not, the user is informed by block 435 that his utterance does not match any of the words acceptable in the current context. He may be informed of what words are valid in the current context, and control returns to connector 400, where the user may re-attempt to speak a word or he may request to enter training through block 410.

20        30        After an acceptable match is found, block 440 may determine that more training is required for the matched word, according to such criteria as the number of attempts required to match the word and the match probability. Control could then

pass through connector **600** to the flow depicted in **FIG. 7** (to be discussed below).

Alternatively, a marginally recognized spoken word (i.e. a word for which the calculated probability of match is slightly (for example 5-10%) below the desired pre-set threshold for correct recognition) may be used to form an additional word model

5 to be added to models **210**. That is, memory permitting, models **210** could be updated to include acceptable, but somewhat deviant, pronunciations of recognized words. Prior to storing such a marginally recognized model, a user may be prompted to confirm that the marginal recognition is indeed correct. Optionally, such models could be deleted if not used for recognition for a set period of time, or as

10 memory **14** used to store models **210** fills.

Block **450** reports the matched word or utterance to the main application **1000**, which executes the actions requested by the user. The matched word or utterance may be reported as data representing a text version of the word, or as one or more tokens indicative of the word, understood by application **1000**. Each token may for example represent one word within the default set of words understood by the system, as illustrated by tokens **205** and **215** in **FIGS. 3A** and **3B**. For recognized words representing compound commands, multiple tokens may be provided to application **1000**, as illustrated in **FIG. 3B**. Application **1000** may be a portion of system **10** enabling system **10** to act as a voice messaging system, exemplary an embodiment of the present embodiment. Specifics of system **10**, adapting it to act as an otherwise conventional voice messaging system will be appreciated by a person of ordinary skill in the art, and will thus not be discussed herein.

25

Application **1000** accordingly processes the recognized word or utterance. If the recognized word or utterance represents a command or series of commands, application **1000** may process the command(s). Alternatively, if the recognized word represents multiple default commands, a series of commands will be executed by application **1000**.

30

According to the word spoken by the user, the application may instruct block 460 that a new context is to take effect. For example, the user may have spoken a command such as CALL, indicating that he wishes to place a call; the new context would be established in which the user could speak the digits of the called party's 5 number, but in which he could not speak command words such as CALL. If a new context is to be loaded, block 460 loads speaker-independent word models and user-trained models (if any) of words valid in the new context.

Control then passes to connector 400 to repeat the flow of FIG. 4 for the next 10 user utterance or key-press.

FIG. 6 is entered through connector 500 when the user requests to train the system. Block 510 may be used at any time to return the user back to the previous flow when he so requests by pressing a predetermined key on his keypad. At this point, a user may also choose to add a new utterance to the existing vocabulary of 15 command words, and may be so prompted. If this latter selection is made, the flow depicted in FIGS. 8A and 8B is preferably entered at connector 700, as later described.

If a user wishes to program system 10 to include user-dependent versions of 20 existing recognized words, he may press a key that directs block 520 to speak to him a word from the vocabulary of the current language. In block 520, system 10 may replay the word from the default vocabulary to be programmed. In the event an alternative word has been pre-programmed, then a recording of this alternate word 25 may likewise be replayed. (Each pass through the flow of FIG. 6 will use a different one of the words.) He then may press predetermined keys that block 530 passes to block 540 for interpretation as whether he wishes to skip, test, or train the word. Skipping the word simply returns him to connector 500 where he may exit training 30 system 10 or go on to the next sequential word.

If he requests testing the utterance, he speaks the utterance and block 560 attempts to match this utterance of a word or words against stored model(s) of it (the

speaker-independent model, and the user-trained model if there is one). Block 570 advises him of the quality of the match, and returns him for another pass through the flow of **FIG. 6**.

5 If the user elects to train the word, control is dispatched to the flow of **FIG. 7**, to be discussed below. Upon returning therefrom, the user is dispatched to another pass through the flow of **FIG. 5**.

10 **FIG. 7** is entered through connector 600 when a user has requested to train a word, or when the flow of **FIG. 5** has determined that he should train a word. The word to be trained is known upon entry to blocks 610 and 620, which are repeated a number of times (three in a preferred embodiment). Block 610 prompts the user to speak the word, and block 620 computes a model of the word.

15 Block 630 computes a composite model from the models computed by the multiple executions of block 620. Block 640 stores the composite model thus computed in user-trained models 210 in a storage area within memory 14 of system 10 associated with the current user.

20 Blocks illustrated in **FIG. 8A** and **8B** entered through connector 700 are performed in response to a user choosing to add a new utterance and corresponding model to commands of the existing vocabulary in block 510 (**FIG. 6**). In the event the user wishes to add a model representing a new utterance to the vocabulary, the user may be prompted in blocks 710 and 720 to scroll through 25 default system commands to select one or more commands to be represented by the newly added model. A plurality of system commands may be represented by an utterance defined by a single speaker dependent model. Thus, for example, a user could define a compound command from several system commands. The user may separate system commands by entering a suitable delimiter. Each command or 30 compound command could be represented by a single word, or an utterance of several words, for which an appropriate model would be stored within models 210. Once the user has completed entry of system commands to be represented by the

50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125 130 135 140 145 150 155 160 165 170 175 180 185 190 195 200 205 210 215 220 225 230 235 240 245 250 255 260 265 270 275 280 285 290 295 300 305 310 315 320 325 330 335 340 345 350 355 360 365 370 375 380 385 390 395 400 405 410 415 420 425 430 435 440 445 450 455 460 465 470 475 480 485 490 495 500 505 510 515 520 525 530 535 540 545 550 555 560 565 570 575 580 585 590 595 600 605 610 615 620 625 630 635 640 645 650 655 660 665 670 675 680 685 690 695 700 705 710 715 720 725 730 735 740 745 750 755 760 765 770 775 780 785 790 795 800 805 810 815 820 825 830 835 840 845 850 855 860 865 870

newly added utterance, the user may enter or speak another suitable delimiter, such as a key press representing a "\*" or "#" to continue with block 730. In block 730, the combined system commands may optionally be played back to the user, allowing the user to hear the sequential commands to be represented by any newly added

5 utterance. Next, in block 740 the user is prompted to speak a suitable utterance, for which a user-trained model is to be stored in block 840 (FIG. 8B). System 10 optionally replays the utterance for the user's benefit in block 750. This stored utterance may also be used in replaying valid words to the user in block 435 (FIG. 5). In step 760, a model of the utterance is computed. Optionally, blocks 730 and 10 onward are repeated multiple times, in order to calculate multiple models for the word. Preferably, three independent models are calculated. In the event one model deviates considerably from another as determined in block 770, the user may be prompted to re-perform steps leading up to formation of the deviant model. A representative version of the spoken utterance may optionally be stored for future 15 reproduction in block 780. After a suitable number of models have been captured, a composite word model is computed by block 790. Next, a confusability test for the calculated model is performed in blocks 810-830 (FIG. 8B). Many suitable techniques for administering confusability tests will be known to those of ordinary skill in the art. U.S. Patent No. 5,664,058 describes one such technique. 20 Specifically, the computed average model may be compared to models stored within word models 200 and models 210. In the event the average model too closely resembles another stored word model, so that recognition is difficult and confusion is likely to occur when the system is used, the user is prompted to choose another utterance for the desired command in block 830. Thereafter, the user is prompted to 25 re-train the utterance and blocks 740 and onward are repeated through entry at connector 735 (FIG. 8A). Once a model passing the confusability test is computed, it is stored in step 840 with the remaining user trained models 210 within memory 14 of system 10, and training is exited. A corresponding token representing the command or commands representing the stored words may also be stored with the 30 user trained models 210.

FIGS. 2, 3A and 3B show conventional word models (FIG. 2) and word models used with exemplary embodiments of the present invention (FIGS. 3A, 3B). Unlike the practice in conventional systems, user-trained models 210 (FIG. 3A) exemplary of an embodiment of the present invention do not replace the 5 corresponding speaker-independent models 200. Thus, if a user is not properly identified as discussed above, a good likelihood still exists that his utterances can be matched, at least in the speaker-independent models. Similarly, if a user calls in on a telephone connection that has markedly different or degraded characteristics from his normal connection there is still a good likelihood of recognizing his utterances.

10

Thus, word models 210 correspond to commands for which speaker independent models 210 are stored. As illustrated, each of word models 200 may be associated with one of command tokens 205, representative of how a recognized word is to be processed by system 10. Each of speaker dependent word models 210, on the other hand, is associated with one or more tokens 215 corresponding to the token associated with the speaker independent word model in for that word amongst word models 210, or as determined in block 710. Thus, in the example illustrated in FIG. 3A and 3B, the speaker dependent word models for the words THREE, SEVEN and EIGHT correspond to the tokens for speaker independent word models of these words. Similarly, the word model for LISTEN is associated with the token conventionally associated with the default PLAY command. Similarly, the word model associated with the word SKIP is associated with two tokens, representing the NEXT command. Thus, the word SKIP will effectively be recognized as the command associated with repeating the word NEXT twice. Lastly 25 the example speaker dependent word model for the word QUIT is associated with the command token associated with the STOP command. As such, the word QUIT when recognized will be interpreted as the command associated with the utterance of the default command STOP.

30 This ability for user-trained models to co-exist with speaker-independent models allows the "coverage" of speaker-independent models to be extended to cover regional differences in speech; for example, a set of American-English-

language models may be directly usable for most users who speak standard American English, while users whose pronunciation of certain words may be affected by regional variations can train those particular words.

5         Similarly, for voice commands, recognition models for custom voice commands as well as models for default commands may be stored as illustrated in **FIGS. 3A and 3B**. A custom utterance may be added to the command set. This custom utterance may be used to initiate the same command as a word within the default command set. Commands may thus be associated with tokens interpreted  
10 by system 10. Tokens representing the meaning of custom commands may be stored in conjunction with the word models for such commands. As such, a custom word may be used to initiate a plurality of commands, otherwise initiated by multiple words within the default command set. A user may thus simplify use of the system 10 to correspond to the user's preferences. The system may be configured so that commands correspond to those with which the user is accustomed. Similarly, the user may store word models representative of macros, represented by a chosen utterance and interpreted as a series of commands. As will be appreciated, these macros could be further associated with spoken numbers recognized by system 10, so that these macros may be used to speed dial extensions, and the like.

20         It will thus be seen that the invention efficiently attains at least some of the objects set forth above, among those made apparent from the preceding description.

25         In particular, the invention provides enhanced speech recognition of non-standard users without requiring a long training period and with adaptation to a variety of characters and qualities of transmission media, and allows a user to use custom words as system commands. Those skilled in the art will appreciate that the configurations depicted in **FIGS. 1, 3A, 3B, 4, 5, 6, 7, 8A and 8B** and their supporting discussion in the specification provide enhanced speech recognition meeting these objects.

30         It will be understood that changes may be made in the above construction and in the foregoing sequences of operation without departing from the scope of the

invention. It is accordingly intended that all matter contained in the above description or shown in the accompanying drawings be interpreted as illustrative rather than in a limiting sense.

5 It is also to be understood that the following claims are intended to cover all of the generic and specific features of the invention as described herein, and all statements of the scope of the invention which, as a matter of language, might be said to fall therebetween.

10 Having described the invention, what is claimed as new and secured by Letters Patent is:

1. 1. A speech recognition system comprising computer memory storing:
  - 2 a first set of speaker-independent word models used to match a word in an
  - 3 utterance of a user with a word model in said first set;
  - 4 a second set of speaker dependent word models derived from speech of a
  - 5 particular user and used to match a word in an utterance of said particular
  - 6 speaker;
  - 7 a program portion used to identify words in utterances of said particular user by
  - 8 attempting to match portions of an audio signal with
  - 9 word models among said first set; and
  - 10 word models among said second set.
1. 2. A method of operating a speech recognition system comprising:
  - 2 storing a first set of speaker-independent word models used to match a word in
  - 3 an utterance of any user with a word model in said first set;
  - 4 storing a second set of speaker dependent word models derived from speech of
  - 5 a particular user;
  - 6 recognizing words in utterances of said particular user by attempting to match
  - 7 portions of an audio signal with
  - 8 word models among said first set; and
  - 9 word models among said second set.
1. 3. The method according to claim 2 further comprising:
  - 2 inviting said particular user upon first use of said speech recognition system to
  - 3 speak training words for deriving said second set;

4 deriving said second set from said training words; and  
5 storing said second set.

1 4. The method according to claim 2 further comprising:

2 inviting said particular user to speak training utterances of a word upon a  
3 predetermined number of failures to recognize said word using said first set of  
4 word models;

5 deriving a word model from said training utterances; and  
6 storing said word model from said training utterances, in said second set.

1 5. The method of claim 2, further comprising:

2 determining a likelihood of recognizing a spoken word using said first set;  
3 deriving a word model from a spoken word marginally recognized using said  
4 first set;  
5 storing said word model in said second set.

1 6. A method of enhancing speech recognition comprising:

2 providing a set of user-independent word models derived from utterances of a  
3 plurality of speakers;

4 providing a set of user-dependent word models for ones of a plurality of users  
5 each derived from utterances of one of said users;

6 matching an utterance from one of said users to one of said user-independent  
7 word models; and

8 matching another utterance from said one of said users to one of said user-  
9 dependent word models.

1 7. The method according to claim **6** further comprising:

2 inviting a new user to speak training words for deriving a set of user-dependent

3 word models;

4 deriving said set of user-dependent models from said training words; and

5 storing said set of user-dependent word models.

1 8. The method according to claim **7** further comprising:

2 inviting a new user to speak training utterances of a word upon a predetermined

3 number of failures to identify the word among said user-independent word models

4 when no model for said word is present in said user-dependent models;

5 deriving a word model from said training utterances; and

6 storing the derived word model in said set of user-dependent word models.

7 9. The method according to claim **8** wherein said user-dependent word models are  
8 stored in a separate memory location from said user-independent word models.

9 10. A method of operating a speech recognition system, comprising:

10 storing a first set of recognition models, for recognizing speech independent of  
11 the identity of a user, said first set of recognition models for recognizing a  
12 plurality of system commands;

13 storing a second set of recognition models, for recognizing speech of a particular  
14 user, at least one model of said second set for initiating performance of at least  
15 one of said plurality of system commands, so that at least one of said system  
16 commands may be performed in response to a recognized user chosen  
17 utterance.

1 11. The method of claim 10, wherein a single utterance corresponding to one of said  
2 second set of models may correspond to a plurality of sequentially performed  
3 system commands.

1 12. The method of claim 10, further comprising:  
2 comparing each model of said second set of recognition models to each of said first  
3 set of recognition models and other ones of said second set, to ensure that speech  
4 recognized using each model in said second set will not be mistakenly recognized  
5 using any model in said first set, or other models in said second set, prior to storing  
6 said each model.

1 13. A voice messaging system, comprising a speech recognition system for controlling  
2 operation of said voice messaging system, said speech recognition comprising:  
3 memory storing  
4 a first set of word models, for recognizing speech independent of the  
5 identity of a user, said first set of word models for recognizing a plurality of  
6 system commands controlling operation of said voice messaging system;  
7 a second set of models, for recognizing speech of a particular user, at  
8 least one model of said second set for initiating performance of at least  
9 one of said plurality of system commands, so that at least one of said  
10 system commands may be performed in response to a recognized user  
11 chosen word.

1 14. The voice messaging system of claim 13, wherein said memory further contains  
2 computer executable instructions, adapting said system to record utterances by said  
3 particular user to form said second set, and to collect indicators of system  
4 commands to be associated with each model in said second set.

1 15. The voice messaging system of claim 14, wherein said memory further stores  
2 computer executable instructions adapting said system to prompt a user to record  
3 utterances in place of system commands.

1 16. The voice messaging system of claim 14, wherein said memory further contains  
2 computer executable instructions adapting said system to ensure that speech  
3 recognized with each model in said second set will not likely be recognized with any  
4 model in said first set or other models in said second set, prior to storing said each  
5 model in said second set.

1 17. The voice messaging system of claim 16, wherein at least one model in said second  
2 set initiates performance of more than one of said plurality of system commands.

1 18. A computer readable medium, storing  
2 a first set of recognition models, for recognizing speech independent of the  
3 identity of a user at a speech recognition system, at least some of said models in  
4 said first set for recognizing a plurality of system commands;  
5 computer executable instructions, that when executed at said speech recognition  
6 system, adapt said speech recognition system to form and store a second set of  
7 models, for recognizing speech of a particular user, with at least one model of  
8 said second set for initiating performance of at least one of said plurality of  
9 system commands, so that at least one of said system commands may be  
10 performed in response to a recognized word chosen by said particular user.

1 19. The computer readable medium of claim 18, further storing computer executable  
2 instructions adapting said system to record utterances by said particular user to form  
3 said second set of models, and to associate at least one system command with  
4 each model in said second set of models.

- 1 20. The computer readable medium of claim 19, further storing computer executable
- 2 instructions adapting said system to prompt a user to record utterances in place of
- 3 system commands.
  
- 1 21. The computer readable medium of claim 18, further storing computer executable
- 2 instructions adapting said system to ensure that speech recognized using each
- 3 model of said second set will not be mistakenly recognized with any one model in
- 4 said first set of recognition models, or other models in said second set of models,
- 5 prior to storing said each of said models in said second set.

## ABSTRACT OF THE DISCLOSURE

A system and method for speech recognition includes a speaker-independent set of stored word representations derived from speech of many users deemed to be typical speakers and for use by all users, and may further include speaker-dependent sets of stored word representations specific to each user. The speaker-dependent sets may be used to store custom commands, so that a user may replace default commands to customize and simplify use of the system. Utterances from a user which match stored words in either set according to the ordering rules are reported as words.

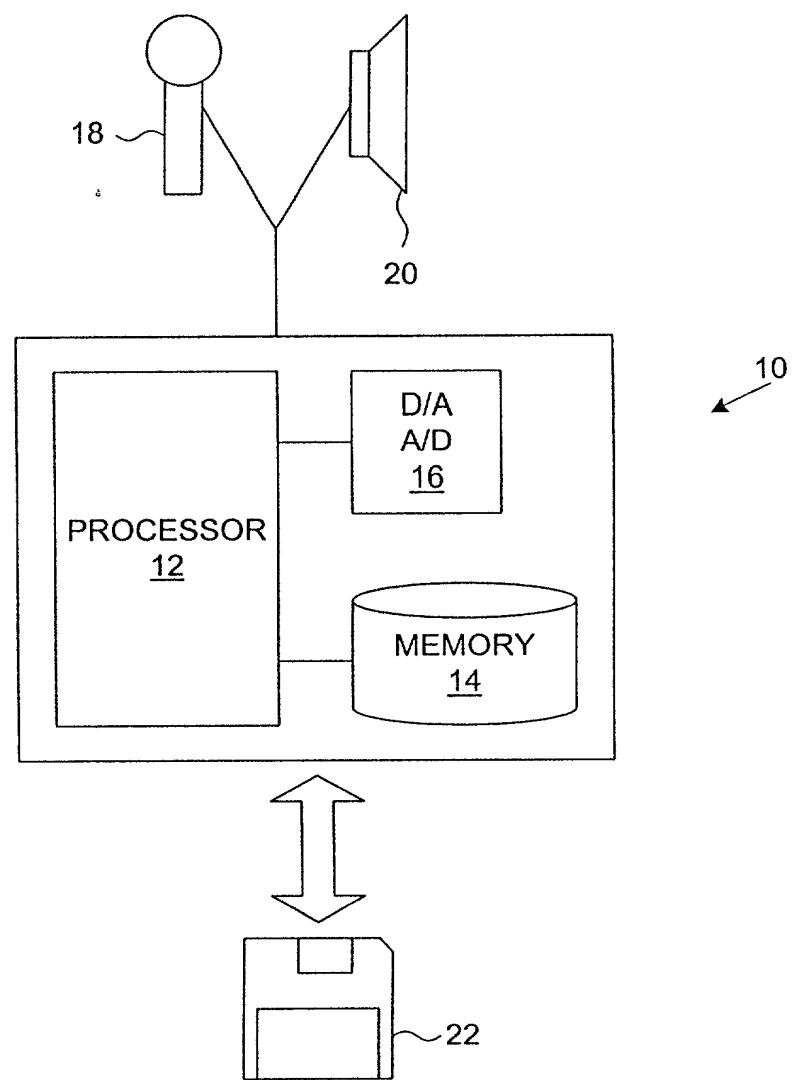


FIG. 1

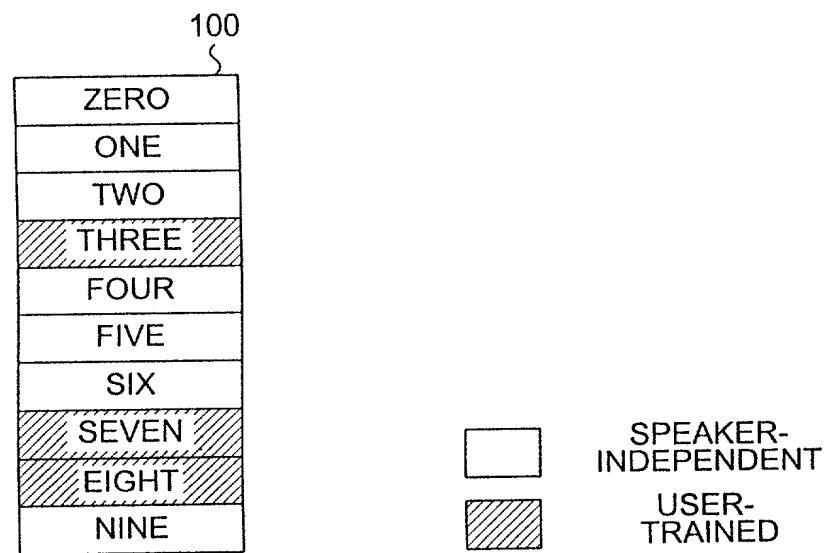


FIG. 2  
(PRIOR ART)

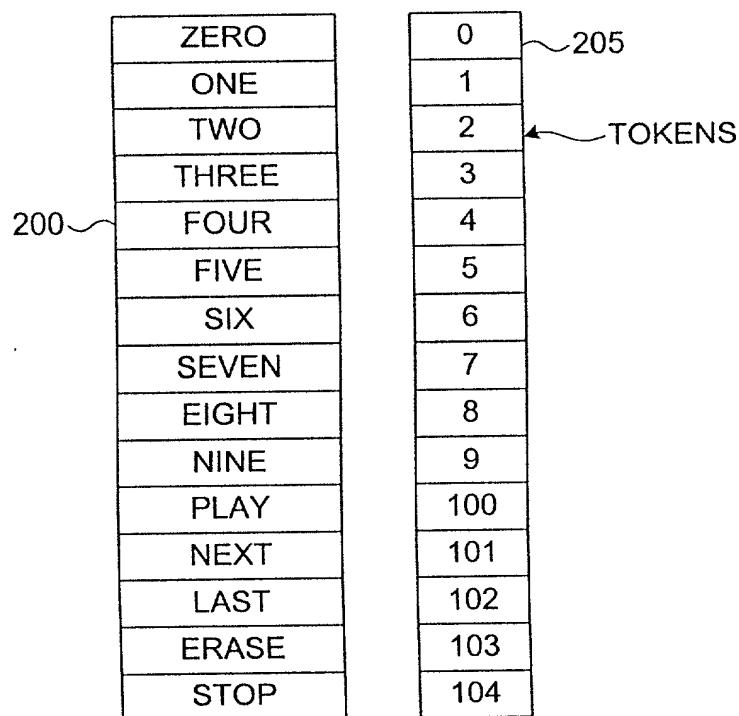


FIG. 3A

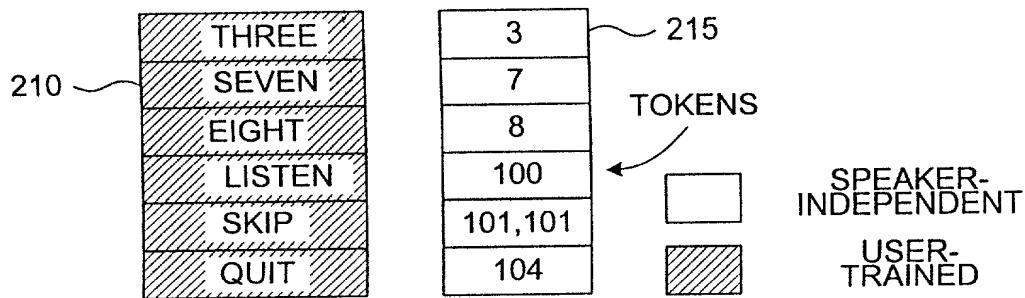


FIG. 3B

00062600 \* 44 T3202 960

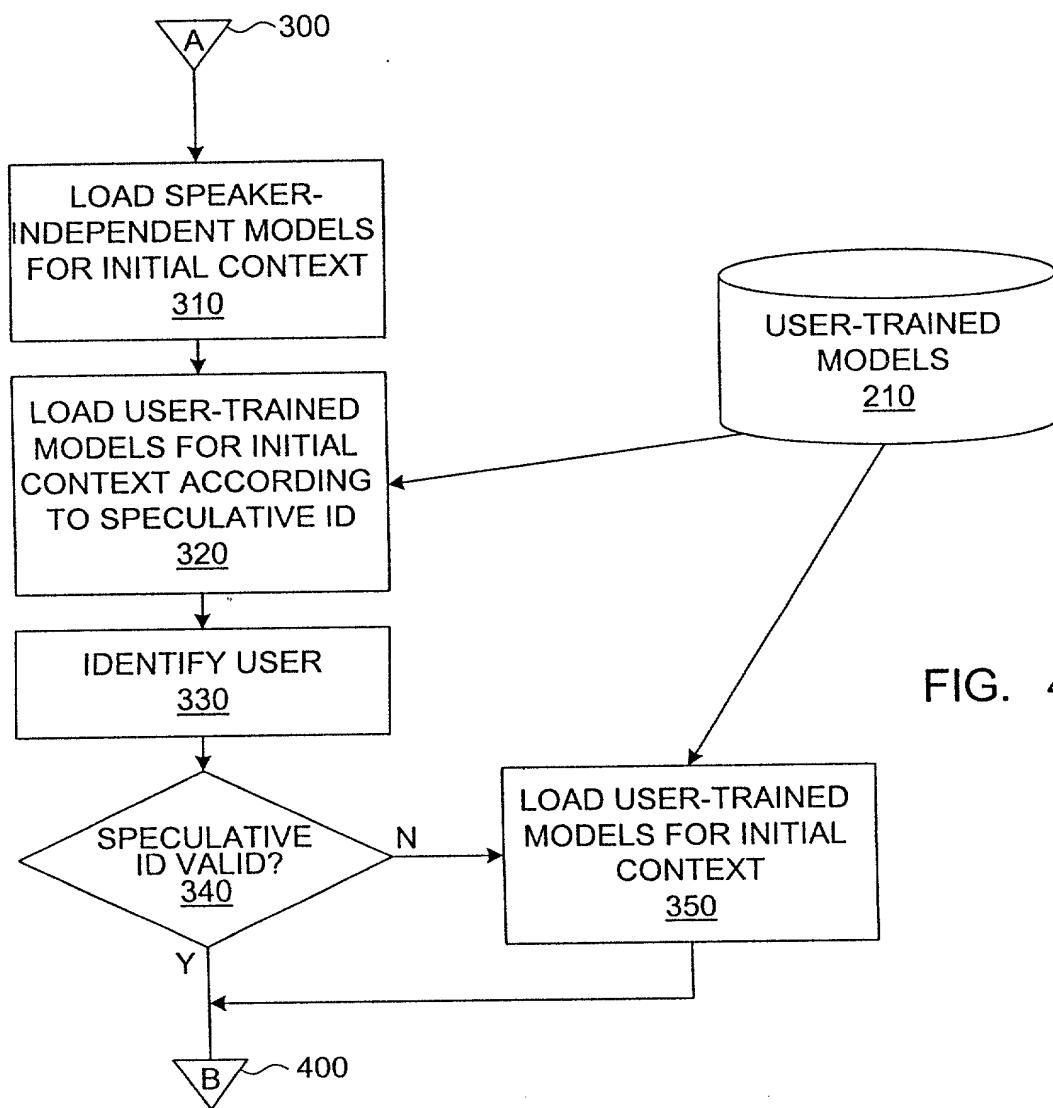


FIG. 4

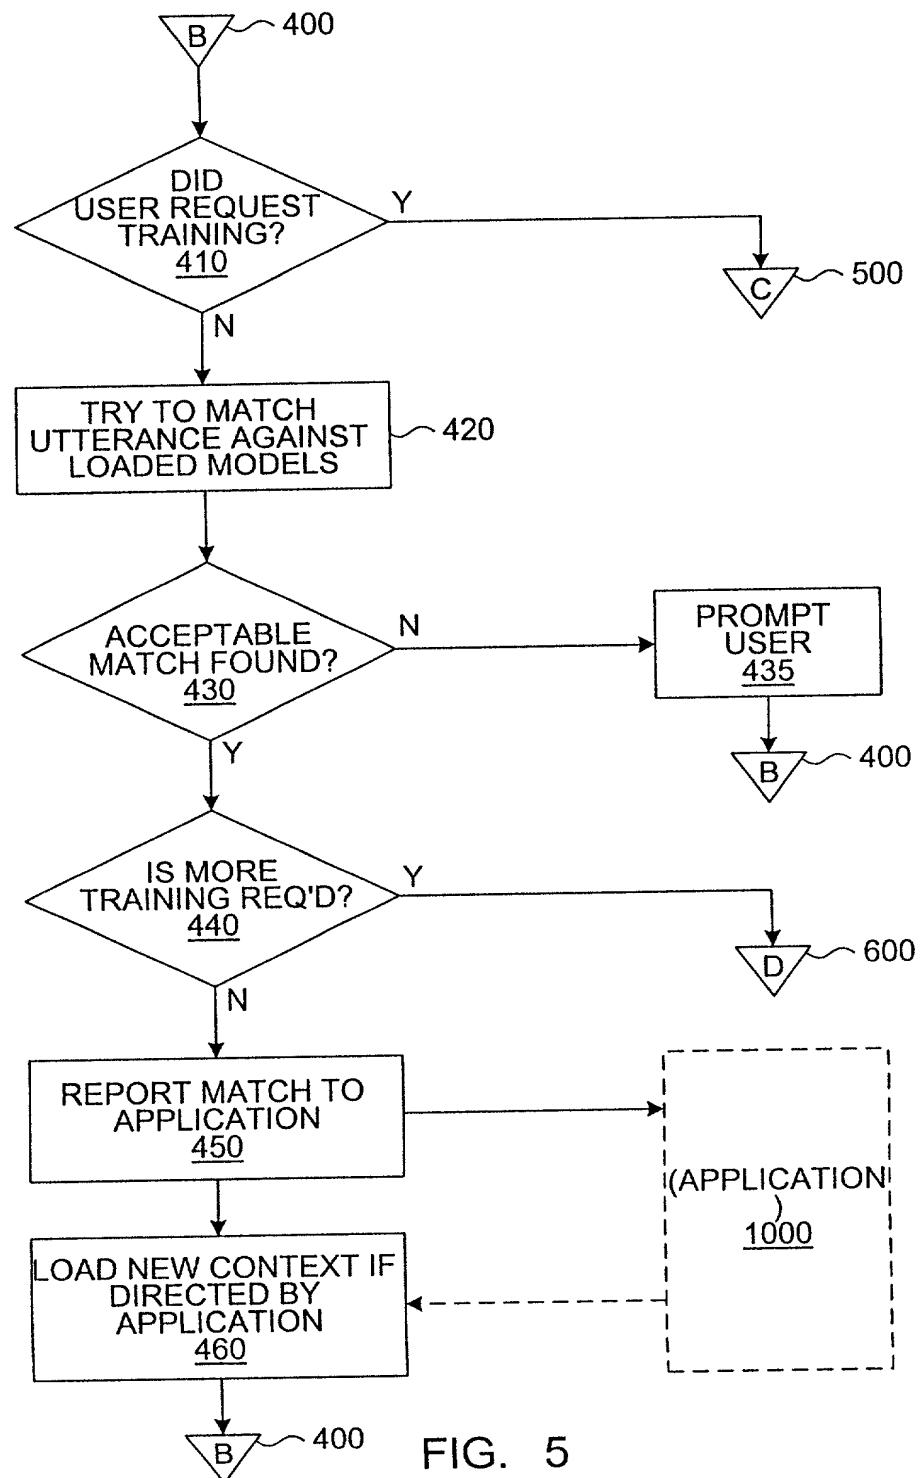


FIG. 5

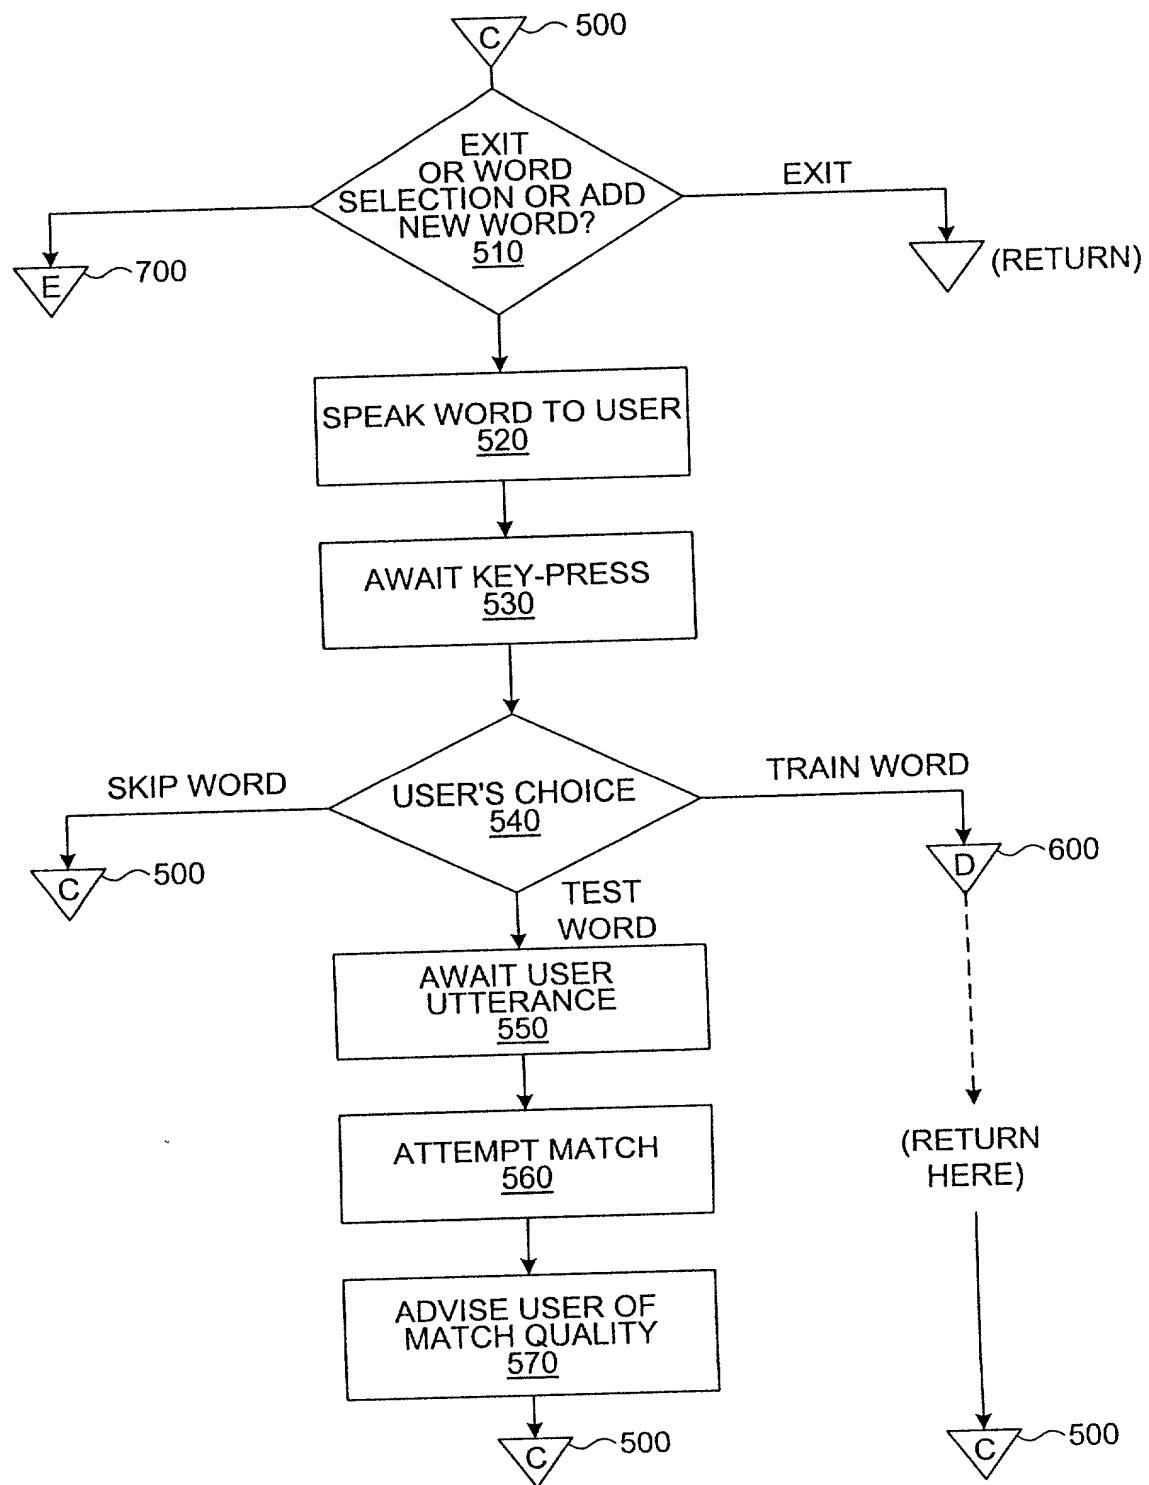


FIG. 6



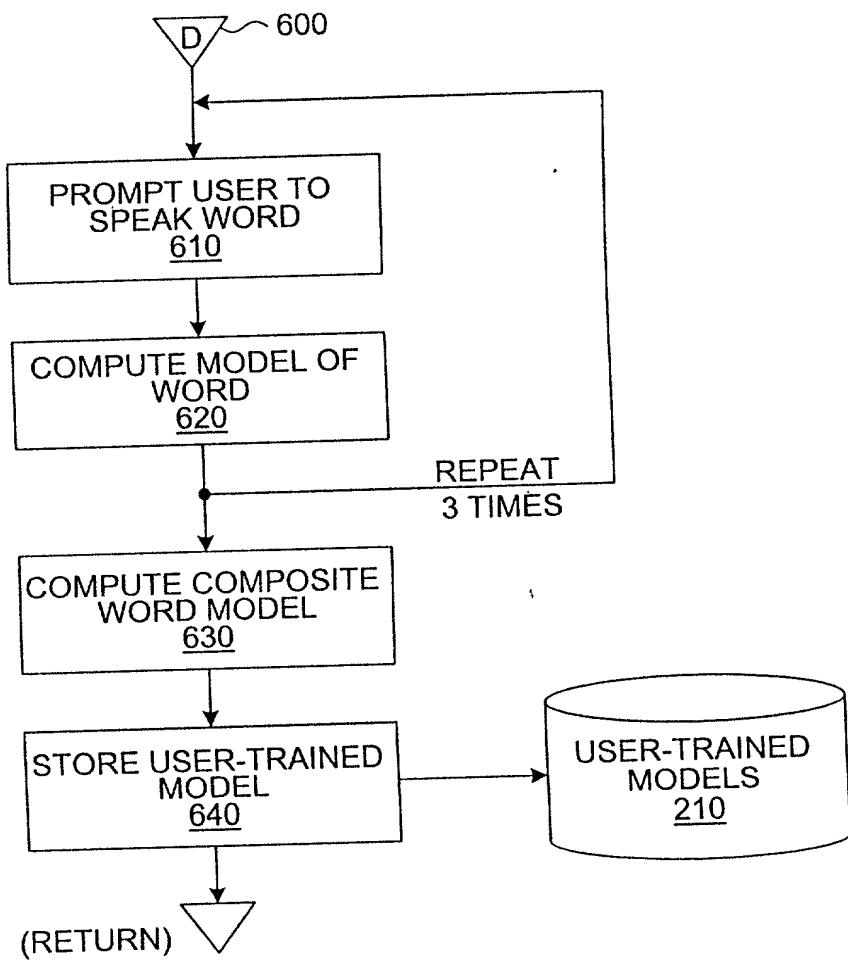


FIG. 7

FIG. 8A

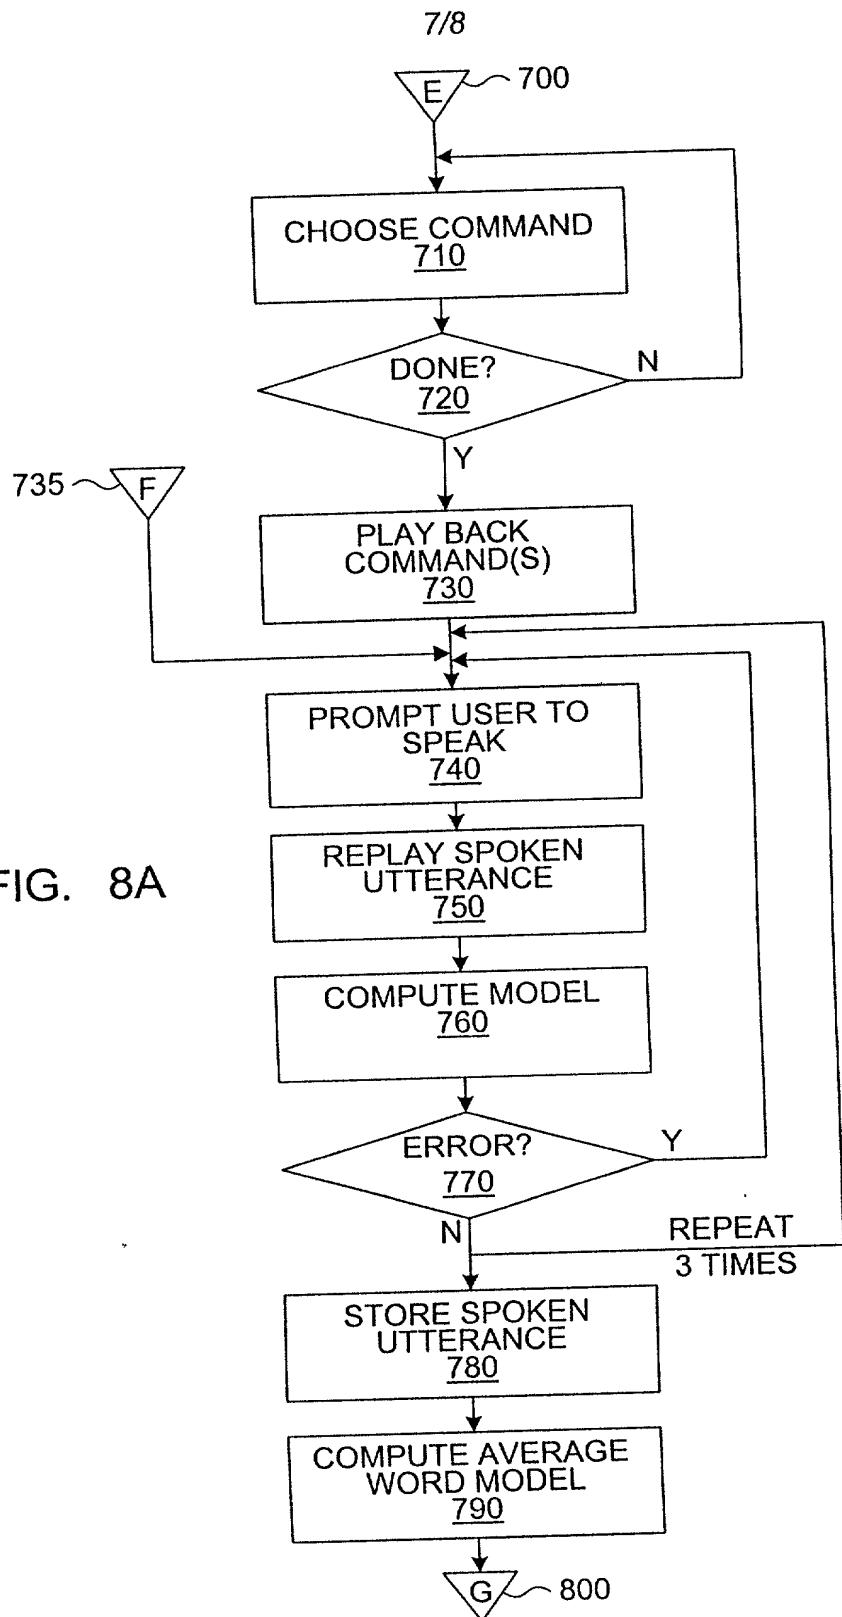

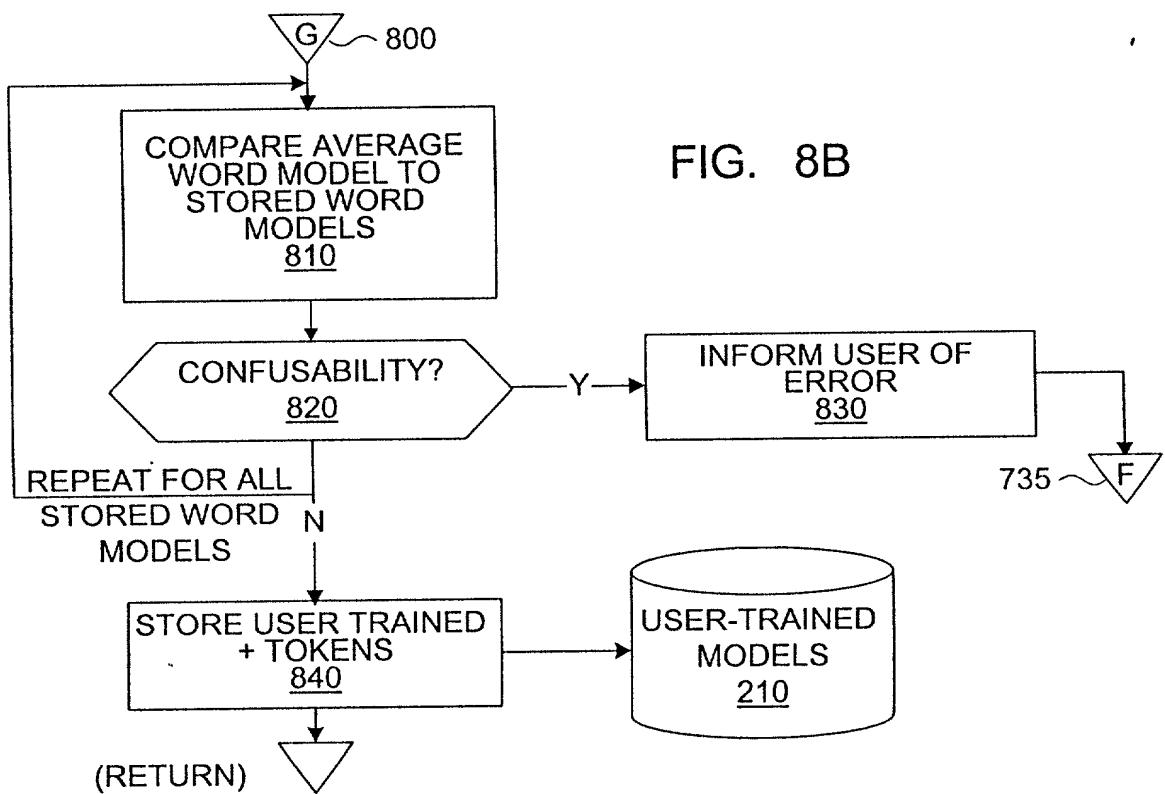

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
COMBINED DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**IMPROVED SPEECH RECOGNITION SYSTEM AND METHOD PERMITTING USER  
CUSTOMIZATION**

the specification of which

(check one)  is attached hereto.  
 was filed on \_\_\_\_\_  
as U.S. Application Serial No. \_\_\_\_\_.  
 was filed on \_\_\_\_\_  
as PCT International Application No. PCT / \_\_\_\_\_.  
and (if applicable) was amended on \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information known to me which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §§ 1.56(a) and (b), which state:

"(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

(1) prior art cited in search reports of a foreign patent office in a counterpart application,

(2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

(1) It establishes, by itself or in combination with other information, a *prima facie* case of unpatentability of a claim; or

(2) It refutes, or is inconsistent with, a position the applicant takes in:

- (i) Opposing an argument of unpatentability relied on by the Office, or
- (ii) Asserting an argument of patentability.

A *prima facie* case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability."

I hereby claim foreign priority benefits under 35 United States Code, § 119 and/or § 365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which priority is claimed, or (2) if no priority claimed, before the filing of this application:

PRIOR FOREIGN APPLICATION(S)

Number	Country	Filing Date (Day/Month/Year)	Date First Laid-open or Published	Date Patented or Granted	Priority Claimed?
--------	---------	---------------------------------	---	--------------------------------	----------------------

I hereby claim the benefit under 35 United States Code, § 119(e) of any United States provisional application(s) listed below:

Application Number Filing Date

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

**PRIOR U.S. OR PCT APPLICATION(S)**

<u>Application No.</u>	<u>Filing Date</u> (day/month/year)	<u>Status</u> (pending, abandoned, granted)
09/281,078	30/03/99	pending

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section

- 3 -

1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following patent agents with full power of substitution, association and revocation to prosecute this application and/or international application and to transact all business in the Patent and Trademark Office connected therewith:

JOHN R. MORRISSEY (Reg. No. 28585)  
KELTIE R. SIM (Reg. No. 34535)  
ALISTAIR G. SIMPSON (Reg. No. 37040)  
MATTHEW ZISCHKA (Reg. No. 41575)

GUNARS GAIKIS (Reg. No. 32811)  
RONALD D. FAGGETTER (Reg. No. 33345)  
YOON KANG (Reg. No. 40386)  
YWE LOOPER (Reg. No. 43,758)

PLEASE SEND CORRESPONDENCE TO:

SMART & BIGGAR  
438 University Avenue  
Suite 1500, Box 111  
Toronto, Ontario  
Canada M5G 2K8

Attention: Matthew Zischka

Tel: (416) 593-5514  
Fax: (416) 591-1690

Date: Sept. 27/00

1) INVENTOR'S SIGNATURE:



Date: Sept. 27/00

2) Inventor's Name: Jason Adelman  
(First) (Family Name)

Country of Citizenship: CANADA

Residence: Toronto, Ontario, Canada  
(City, Province, Country)

Post Office Address: 130 Edith Drive, Toronto, Ontario, Canada M4R 1Z2

1) INVENTOR'S SIGNATURE: Lin

Date: Sep 29, 2000

1) Inventor's Name: Lin Lin  
(First) (Family Name)

Country of Citizenship: CANADA

Residence: Toronto, Ontario, Canada  
(City, Province, Country)

Post Office Address: 96-B Gloucester Street, Toronto, Ontario, Canada M4Y 1L9

...1/2

- 4 -

3) INVENTOR'S SIGNATURE: Lloyd Florence Date: Sep 29 2000Inventor's Name: Lloyd (First) Florence (Family Name)Country of Citizenship: CANADAResidence: Toronto, Ontario, Canada (City, Province, Country)Post Office Address: 258 Spadina Road, Toronto, Ontario, Canada M5R 2V14) INVENTOR'S SIGNATURE: Ping Lin Date: Sep. 29, 2000Inventor's Name: Ping (First) Lin (Family Name)Country of Citizenship: CANADAResidence: Toronto, Ontario, Canada (City, Province, Country)Post Office Address: 96-B Gloucester Street, Toronto, Ontario, Canada M4Y 1L9